


# TRAILER SPECIFICATION

## MobiLED SLM15

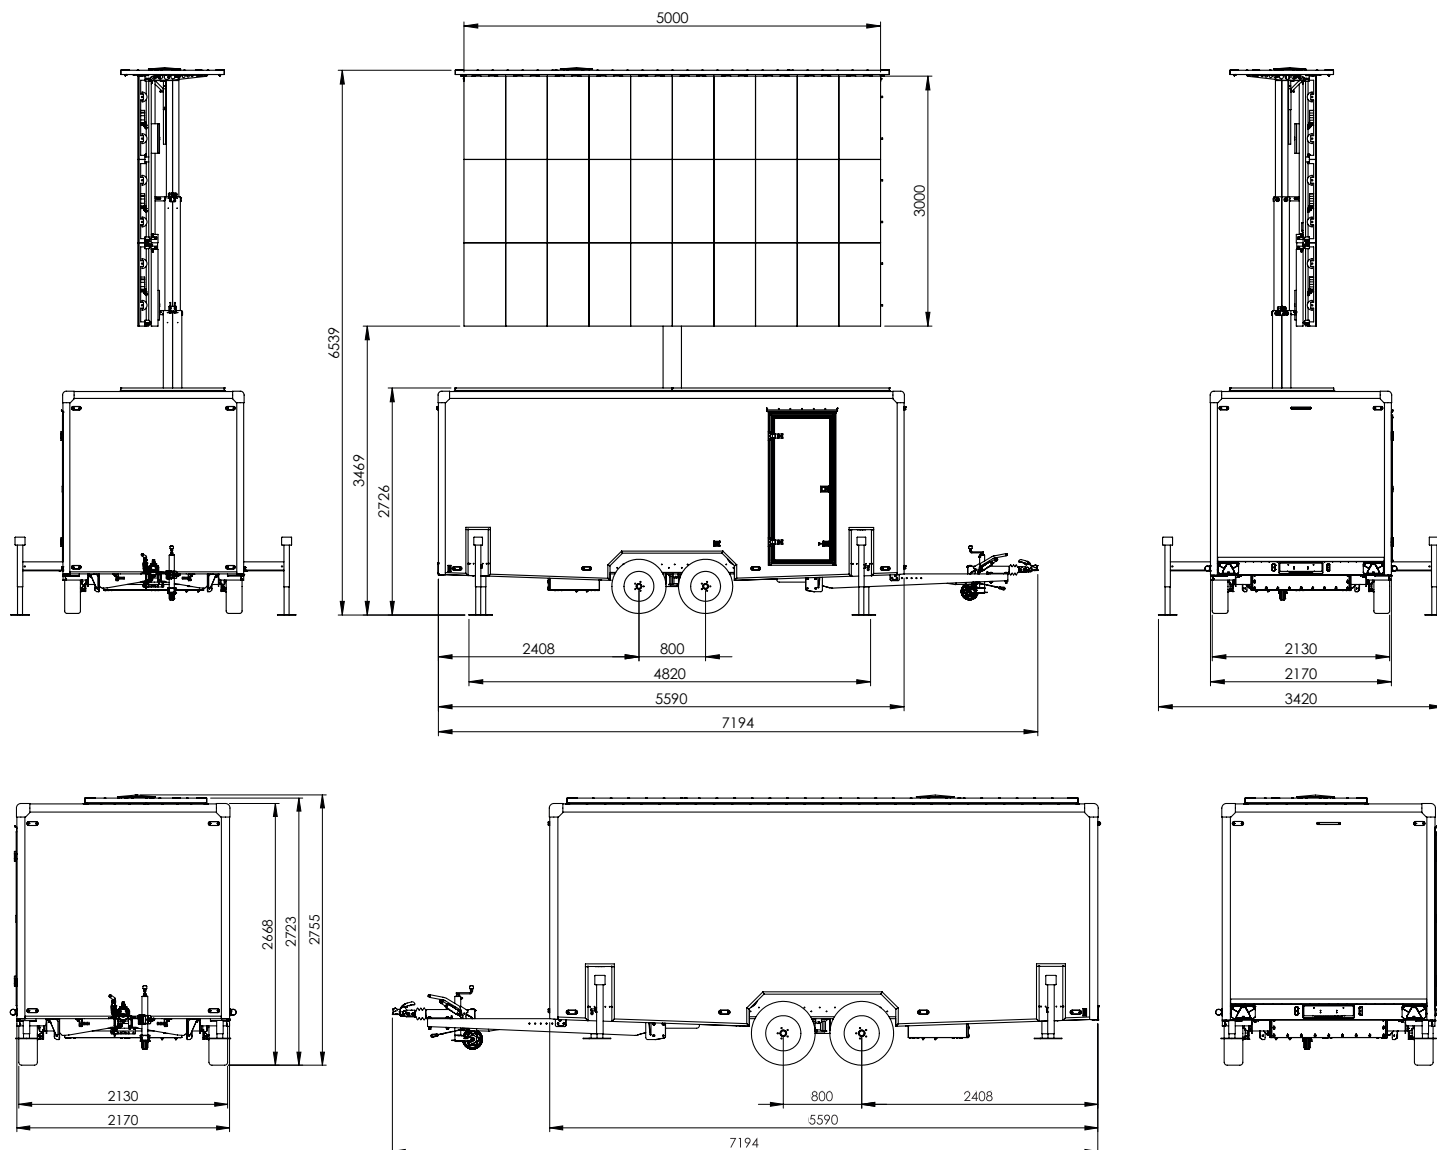

### DIMENSIONS FOR TRANSPORT

Lenght with drawbar	7194 mm
Lenght without drawbar	5590 mm
Width	2170 mm
Height	2755 mm

### DIMENSIONS WITH UNFOLDED SCREEN

Width	3420 mm
Lenght	7194 mm
Height to top of the screen	6539 mm
Height to bottom of the screen	3469 mm

### WEIGHT

GVWR weight	3500 kg
Real weight with the screen	≈ 3200 kg
Real weight without the screen	≈ 2500 kg

### LED SCREEN DETAILS

Area	15 m <sup>2</sup>
Width	5 m
Height	3 m
Model	InfLED GXII (P3.91 or P4.63), InfLED AR (P3.91) or your LED screen
Resolution P3.91	1280 x 768 px
Resolution P4.63	1080 x 648 px
Videoprocessor	Novastar VX4S


## HYDRAULIC SYSTEM

Motor power	1,5 kW (400V)
Flow rate	6 dm <sup>3</sup> /min
Nominal pressure	11 MPa
Oil type	HL46 or HL32 (for lower temperatures)
Oil quantity	≈ 46 dm <sup>3</sup>

## POWER

Power socket	400V 16A
Power generator	for additional fee
GXII screen turned on Max. power consumption (InfLED GXII)	10,20 kW
GXII screen turned on Avg. power consumption (InfLED GXII)	3,39 kW
AR screen turned on Max. power consumption (InfLED AR)	8,10 kW
AR screen turned on Avg. power consumption (InfLED AR)	2,70 kW
Screen mast Power consumption (lifting, rotation)	1,5 kW
Other equipment Power consumption (wind sensor, video processor etc.)	max. 0,5 kW

A-A

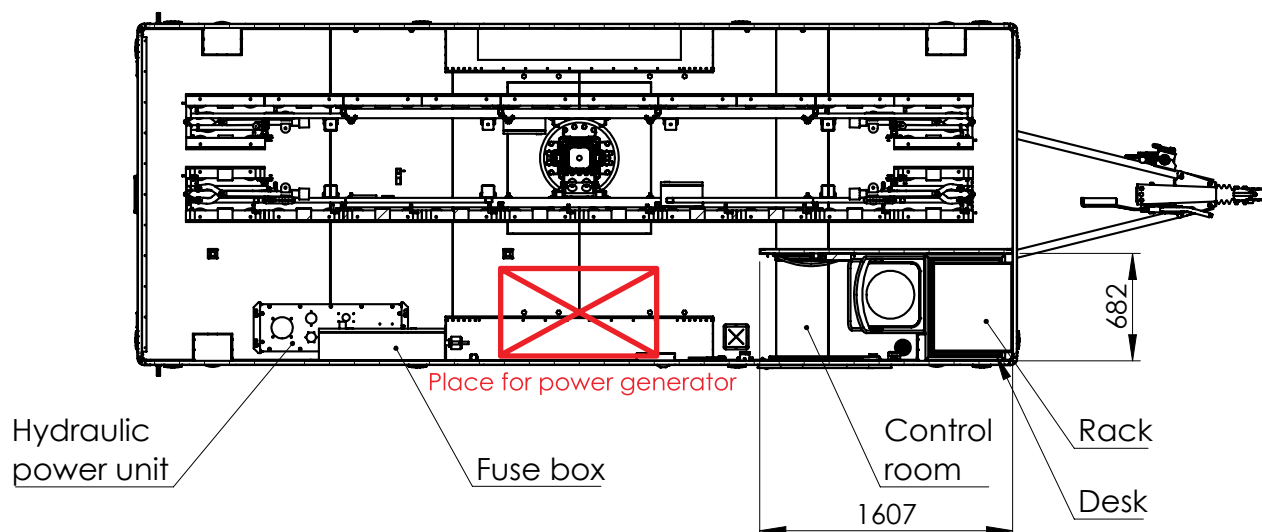

## CONSTRUCTION

Chassis	Galvanized, made according to DIN EN 13814 and DIN EN 13782
Axles and brakes	2x AL-KO
Mast	360° hydraulic rotated, galvanized and black powder coated
Mast control	remote controller, hydraulic levers and emergency hand pump
Walls	Sandwich material (25 mm)
Color	in standard - silver (RAL 9006) additional fee - any from RAL
Wind rating	20 m/s (72 km/h) 15 m/s for TÜV norms (DIN EN 13814)
Wind sensor	according to DIN EN 13814 (with alarm)

## OTHER DETAILS

Wind rating	20 m/s (72 km/h) 15 m/s for TÜV norms
IP rating	IP65 (fully waterproof)
Road approval	EU road approval
Axles	dual axle
Mast control	remote controller, hydraulic levers and emergency hand pump
Warranty	3 years