


TRAILER SPECIFICATION

MobiLED SLM28

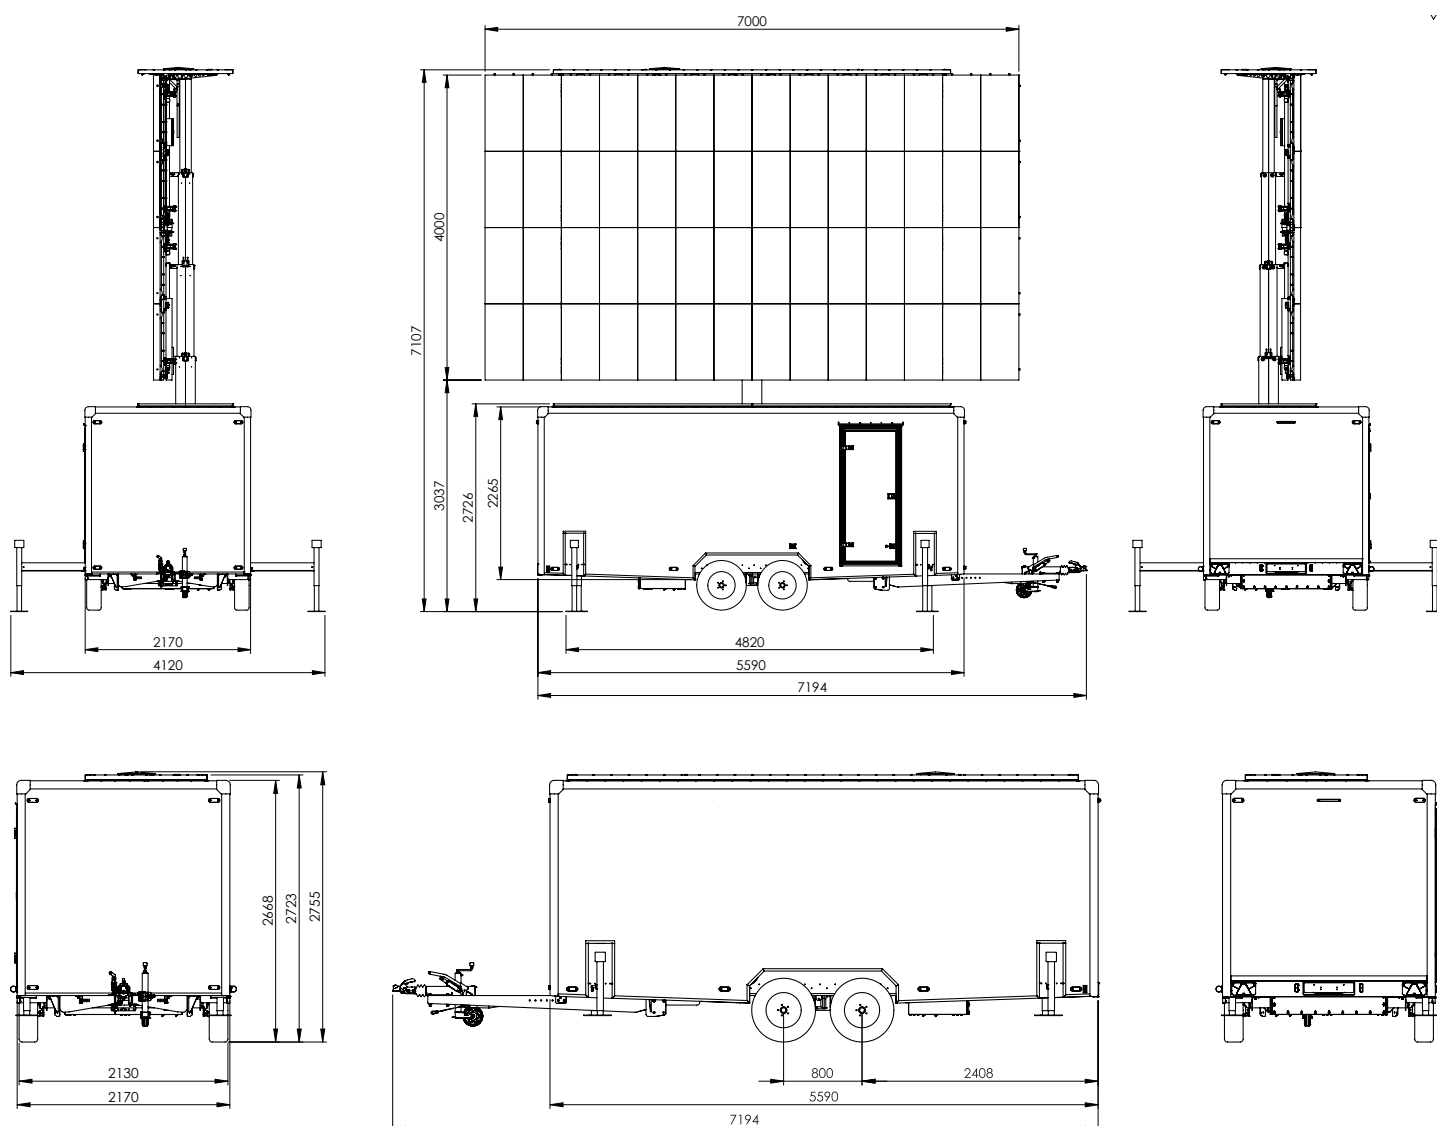

DIMENSIONS FOR TRANSPORT

| | |
|------------------------|---------|
| Lenght with drawbar | 7194 mm |
| Lenght without drawbar | 5590 mm |
| Width | 2170 mm |
| Height | 2755 mm |

DIMENSIONS WITH UNFOLDED SCREEN

| | |
|--------------------------------|---------|
| Width | 4120 mm |
| Lenght | 7899 mm |
| Height to top of the screen | 7107 mm |
| Height to bottom of the screen | 3037 mm |

WEIGHT

| | |
|--------------------------------|-----------|
| GVWR weight | 3500 kg |
| Real weight with the screen | ≈ 3500 kg |
| Real weight without the screen | ≈ 2750 kg |

LED SCREEN DETAILS

| | |
|------------------|---|
| Area | 28 m ² |
| Width | 7 m |
| Height | 4 m |
| Model | Unilumin URMIII03 P3.9 or your LED screen |
| Resolution P3.91 | 1792 x 1024 px |
| Videoprocessor | Novastar VX1000 |


HYDRAULIC SYSTEM

| | |
|------------------|---------------------------------------|
| Motor power | 1,5 kW (400V) |
| Flow rate | 6 dm ³ /min |
| Nominal pressure | 11 MPa |
| Oil type | HL46 or HL32 (for lower temperatures) |
| Oil quantity | ≈ 46 dm ³ |

POWER

| | |
|---|-------------|
| Power socket | 400V 32A |
| Power generator | × |
| Screen turned on Max. power consumption | ≈ 19 kW |
| Screen turned on Avg. power consumption | ≈ 6 kW |
| Screen mast Power consumption (lifting, rotation) | ≈ 1,5 kW |
| Other equipment Power consumption (wind sensor, video processor etc.) | max. 0,5 kW |

A-A

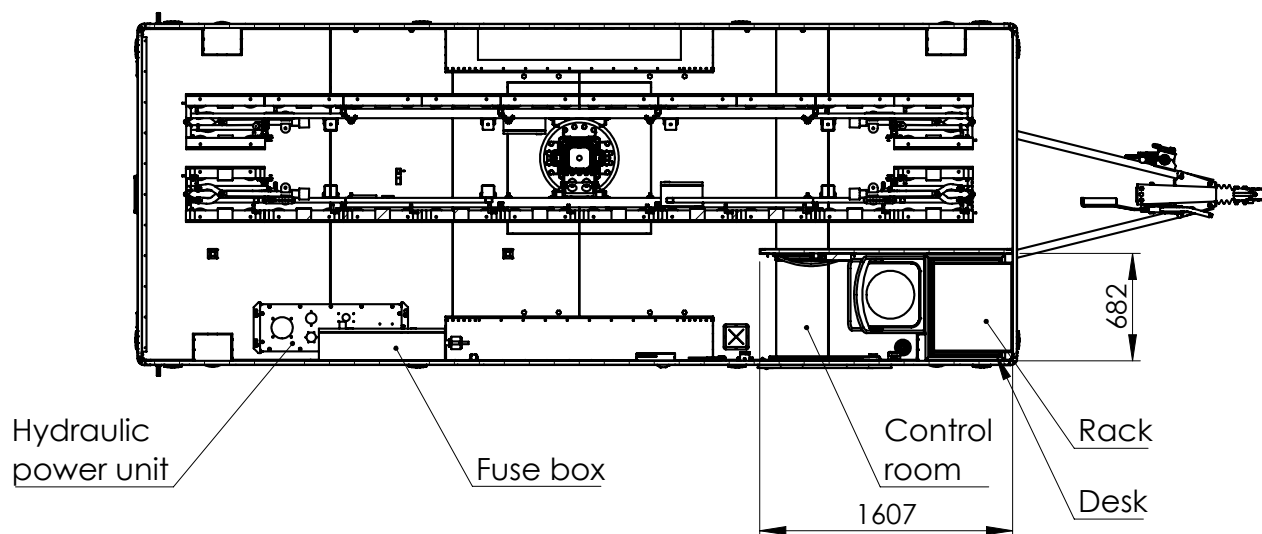

CONSTRUCTION

| | |
|------------------|--|
| Chassis | Galvanized, made according to DIN EN 13814 and DIN EN 13782 |
| Axles and brakes | 2x AL-KO |
| Mast | 360° hydraulic rotated , galvanized and black powder coated |
| Mast control | remote controller, hydraulic levers and emergency hand pump |
| Walls | Sandwich material (25 mm) |
| Color | in standard - silver (RAL 9006) additional fee - any from RAL |
| Wind sensor | according to DIN EN 13814 (with alarm) |

OTHER DETAILS

| | |
|---------------|---|
| Wind rating | 20 m/s (72 km/h) 15 m/s for TÜV norms |
| IP rating | IP65 (fully waterproof) |
| Road approval | EU road approval |
| Axles | dual axle |
| Mast control | remote controller, hydraulic levers and emergency hand pump |
| Warranty | 3 years |