


TRAILER SPECIFICATION

miniPlatformLED SLMP7-lite

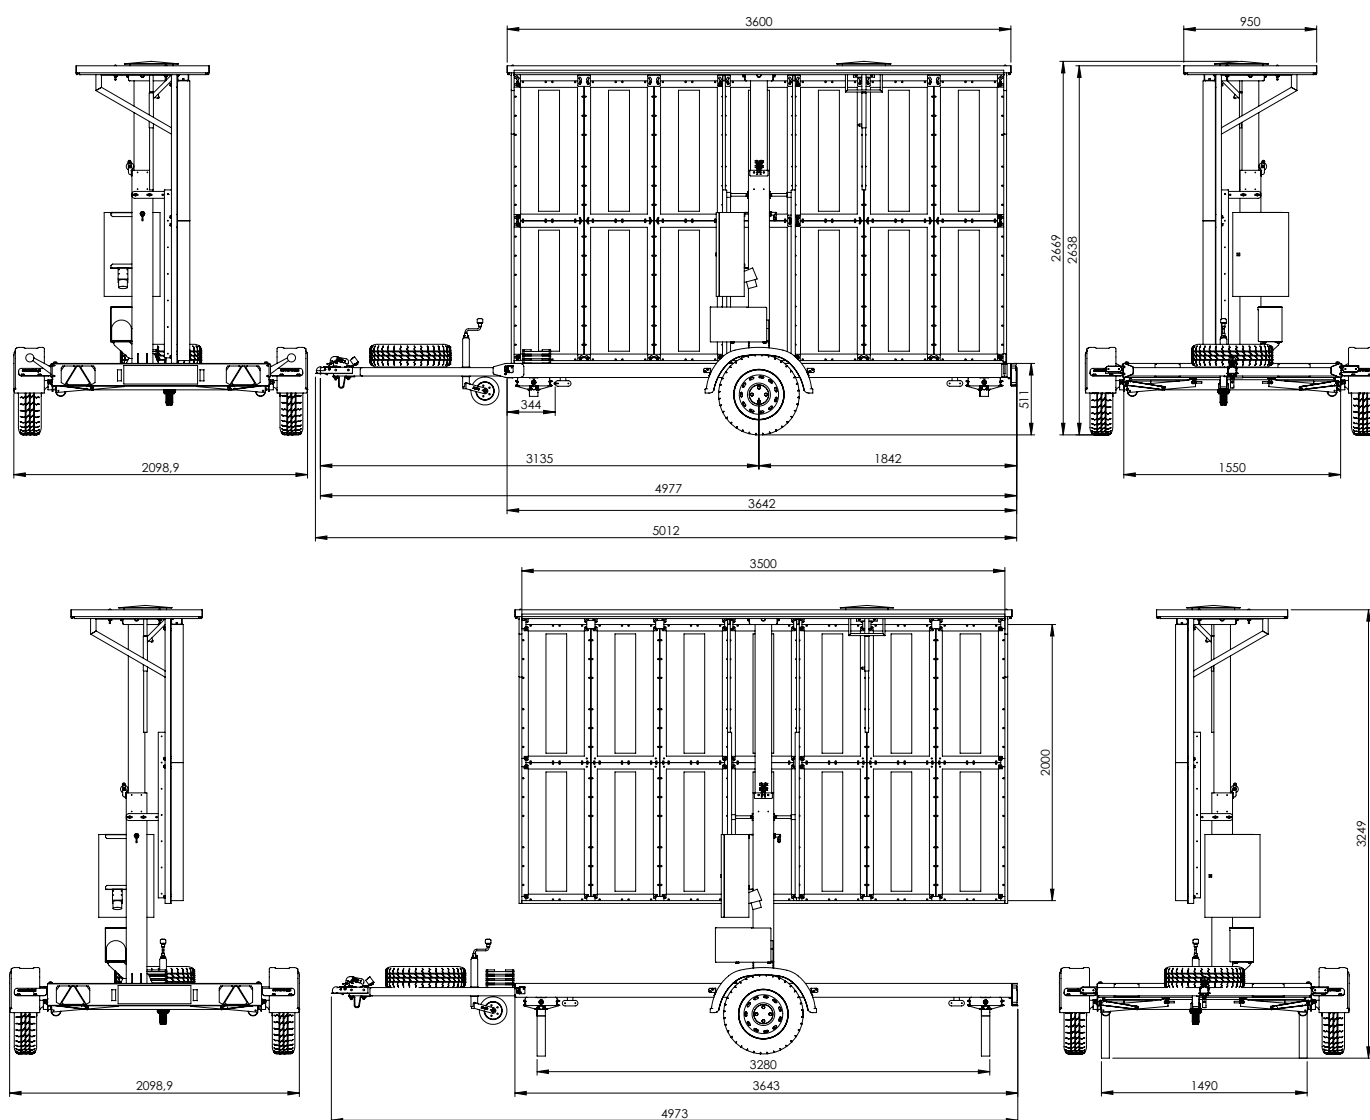

DIMENSIONS FOR TRANSPORT

Lenght with drawbar	5012 mm
Lenght without drawbar	3643 mm
Width	2099 mm
Height	2669 mm

DIMENSIONS WITH UNFOLDED SCREEN

Width	2099 mm
Lenght	5012 mm
Height to top of the screen	3249 mm
Height to bottom of the screen	1142 mm

WEIGHT

GVWR weight	750 kg
Real weight with the screen	≈ 750 kg
Real weight without the screen	≈ 550 kg

LED SCREEN DETAILS

Area	7 m ²
Width	3,5 m
Height	2 m
Model	InfLED GXII (P3.91 or P4.63), InfLED AR (P3.91) or your LED screen
Resolution P3.91	896 x 512 px
Resolution P4.63	756 x 432 px
Videoprocessor	Novastar VX4S

OTHER DETAILS

Wind rating	20 m/s (72 km/h) 15 m/s for TÜV norms
IP rating	IP65 (fully waterproof)
Road approval	EU road approval
Axles	single axle
Mast control	wired controller
Warranty	3 years

POWER CONSUMPTION

Power socket	230V 32A
GXII screen turned on Max. power consumption (InfLED GXII)	4,76 kW
GXII screen turned on Avg. power consumption (InfLED GXII)	1,58 kW
AR screen turned on Max. power consumption (InfLED AR)	3,78 kW
AR screen turned on Avg. power consumption (InfLED AR)	1,26 kW
Screen mast Lifting and lowering	1,3 kW
Other equipment Wind sensor, video processor	max. 0,5 kW